

X67DI1371

1 General information

The module is a digital input module for 24 VDC. It has 8 inputs for sink input circuits.

- For all standard sensors with M8 connectors
- Extremely short cycle times
- Integrated sensor supply with short circuit protection

2 Order data


Model number	Short description	Figure
	Digital input modules	
X67DI1371	X67 digital input module, 8 inputs, 24 VDC, sink, input filter 1 ms	

Table 1: X67DI1371 - Order data

Required accessories

For a general overview, see section "Accessories - General overview" of the X67 system user's manual.

3 Technical data

Model number	X67DI1371
Short description	
I/O module	8 digital inputs 24 VDC
General information	
B&R ID code	0x1434
Status indicators	I/O function for each channel, supply voltage, bus function
Diagnostics	
I/O power supply	Yes, using status LED
Connection type	
X2X Link	M12, B-keyed
Inputs	8x M8, 3-pin
I/O power supply	M8, 4-pin
Power consumption	
Internal I/O	1 W
X2X Link power supply	0.75 W
Certifications	
CE	Yes
KC	Yes
EAC	Yes
UL	cULus E115267 Industrial control equipment
HazLoc	cCSAus 244665 Process control equipment for hazardous locations Class I, Division 2, Groups ABCD, T5
ATEX	Zone 2, II 3G Ex nA IIA T5 Gc IP67, Ta = 0 - Max. 60°C TÜV 05 ATEX 7201X
I/O power supply	
Nominal voltage	24 VDC
Voltage range	18 to 30 VDC
Integrated protection	Reverse polarity protection
Power consumption	
Sensor power supply	Max. 12 W ¹⁾
Digital inputs	
Nominal voltage	24 VDC
Input voltage	18 to 30 VDC
Input current at 24 VDC	Typ. 7 mA
Input characteristics per EN 61131-2	Type 1
Input filter	
Hardware	≤100 µs
Software	1 ms
Input circuit	Sink
Input resistance	Typ. 3 kΩ
Sensor power supply	0.5 A summation current
Switching threshold	
Low	<5 VDC
High	>15 VDC
Isolation voltage between channel and bus	500 V _{eff}
Sensor power supply	
Voltage	I/O power supply minus voltage drop for short circuit protection
Voltage drop for short-circuit protection at 500 mA	Max. 2 VDC
Summation current	Max. 0.5 A
Short-circuit proof	Yes
Electrical properties	
Electrical isolation	Channel isolated from bus Channel not isolated from channel
Operating conditions	
Mounting orientation	
Any	Yes
Installation elevation above sea level	
0 to 2000 m	No limitations
>2000 m	Reduction of ambient temperature by 0.5°C per 100 m
Degree of protection per EN 60529	IP67
Ambient conditions	
Temperature	
Operation	-25 to 60°C
Derating	-
Storage	-40 to 85°C
Transport	-40 to 85°C


Table 2: X67DI1371 - Technical data

Model number	X67DI1371
Mechanical properties	
Dimensions	
Width	53 mm
Height	85 mm
Depth	42 mm
Weight	170 g
Torque for connections	
M8	Max. 0.4 Nm
M12	Max. 0.6 Nm


Table 2: X67DI1371 - Technical data

- 1) The power consumption of the sensors and actuators connected to the module is not permitted to exceed 12 W.

4 LED status indicators



Figure	LED	Color/Status	Description	
<p>Status indicator 1: Left: green; Right: red</p>  <p>Status indicator 2: Left: green; Right: red</p>	Status indicator 1: Status indicator for X2X Link			
	LED	Green (left)	Red (right)	Description
		Off	Off	No power supply via X2X Link
		On	Off	X2X Link supplied, communication OK
		Off	On	X2X Link supplied but X2X Link communication not functioning
		On	On	PREOPERATIONAL: X2X Link supplied, module not initialized
	I/O LEDs			
	LED	Color	Status	Description
	1 - 8	Green	-	Input state of the corresponding digital input
	Status indicator 2: Status indicator for module function			
	LED	Color	Status	Description
	Left	Green	Off	No power to module
			Single flash	RESET mode
			Blinking	PREOPERATIONAL mode
On			RUN mode	
Right	Red	Off	No power to module or everything OK	
		On	Error or reset status	

5 Connection elements

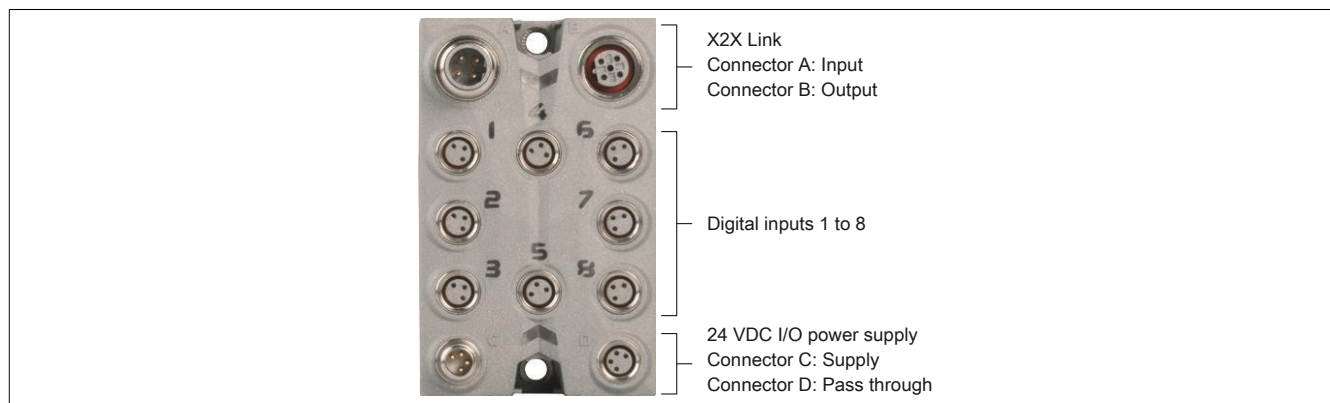

6 X2X Link

This module is connected to X2X Link using pre-assembled cables. The connection is made using M12 circular connectors.



Connection	Pinout	
	Pin	Description
 	1	X2X+
	2	X2X
	3	X2X _L
	4	X2X _I
Shield connection made via threaded insert in the module.		
A → B-keyed (male), input B → B-keyed (female), output		

7 24 VDC I/O power supply


The I/O power supply is connected via M8 connectors C and D. The I/O power supply is connected via connector C (male). Connector D (female) is used to route the I/O power supply to other modules.

Information:


The maximum permissible current for the I/O power supply is 8 A (4 A per connection pin)!

Connection	Pinout	
	Pin	Description
 	1	24 VDC
	2	24 VDC
	3	GND
	4	GND
C → Connector (male) in module, feed for I/O power supply D → Connection (female) in module, routing of I/O power supply		

8 Pinout




X1 to X8
M8 ①



1	+24 VDC
3	GND
4	DI x

- ① X67CA0D40.xxxx: M8 sensor cable, straight
- X67CA0D50.xxxx: M8 sensor cable, angled

8.1 Connections X1 to X8

M8, 3-pin	Pinout	
	Pin	Name
	1	24 VDC sensor supply ¹⁾
	3	GND
	4	Input


1) Sensors are not permitted to be supplied externally.

Connections (female), input

9 Connection example



10 Input circuit diagram

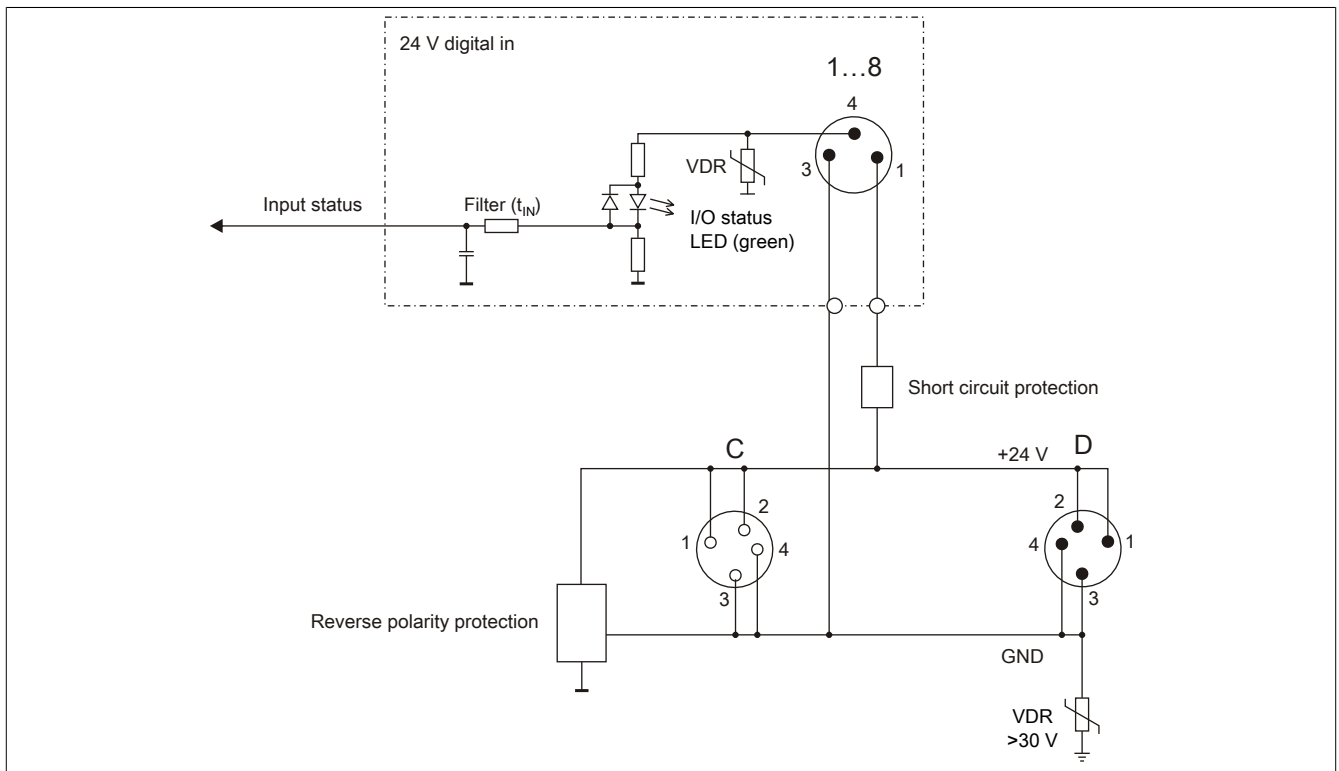

11 Register description

11.1 General data points

In addition to the registers listed in the register description, the module also has other more general data points. These registers are not specific to the module but contain general information such as serial number and hardware version.

These general data points are listed in section "Additional information - General data points" of the X67 system user's manual.

11.2 Function model 0 - Standard

Register	Name	Data type	Read		Write	
			Cyclic	Acyclic	Cyclic	Acyclic
Digital signal - Communication						
0	Input state of digital inputs 1 to 8	USINT	•			
	DigitalInput01	Bit 0				
				
	DigitalInput08	Bit 7				
8192	asy_ModulID	UINT		•		

11.3 Function model 254 - Bus controller

Register	Offset ¹⁾	Name	Data type	Read		Write	
				Cyclic	Acyclic	Cyclic	Acyclic
Digital signal - Communication							
0	0	Input state of digital inputs 1 to 8	USINT	•			
		DigitalInput01	Bit 0				
					
		DigitalInput08	Bit 7				
8192	-	asy_ModulID	UINT		•		

1) The offset specifies the position of the register within the CAN object.

11.3.1 Using the module on the bus controller

Function model 254 "Bus controller" is used by default only by non-configurable bus controllers. All other bus controllers can use additional registers and functions depending on the fieldbus used.

For detailed information, see section "Additional information - Using I/O modules on the bus controller" of the X67 user's manual (version 3.30 or later).

11.3.2 CAN I/O bus controller

The module occupies 1 digital logical slot on CAN I/O.

11.4 Digital signal - Communication

11.4.1 Digital inputs

Filtered

The filtered status is collected with a fixed offset to the network cycle and transferred in the same cycle.

11.4.1.1 Input state of digital inputs 1 to 8

Name:

DigitalInput01 to DigitalInput08

This register indicates the input state of digital inputs 1 to 8.

Data type	Values
USINT	See the bit structure.

Bit structure:

Bit	Name	Value	Information
0	DigitalInput01	0 or 1	Input state - Digital input 1
...		...	
7	DigitalInput08	0 or 1	Input state - Digital input 8

11.4.2 Reading the module ID

Name:

asy_ModulID

This register offers the possibility to read the module ID.

Data type	Values
UINT	Module ID

11.5 Minimum cycle time

The minimum cycle time specifies the time up to which the bus cycle can be reduced without communication errors occurring. It is important to note that very fast cycles reduce the idle time available for handling monitoring, diagnostics and acyclic commands.

Minimum cycle time
150 μ s

11.6 Minimum I/O update time

The minimum I/O update time defines how far the bus cycle can be reduced while still allowing an I/O update to take place in each cycle.

Minimum I/O update time
150 μ s